
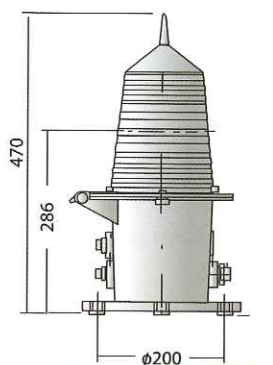


LANTERN INCANDESCENT LAMP TYPE

SPECIFICATIONS- LANTERN TYPE FA-250

HEIGHT OVERALL	APPROX.700mm
FOCAL PLANE HEIGHT	APPROX.360mm
WEIGHT	APPROX.9kg
LENS	φ250mm ACRYLIC FRESNEL LENS
LAMP SIZE	12V, 3W, 6.6W, 9.2W, 13.8W, 24.4W, 36.6W 6-LAMP TURRET SYSTEM
FLASHER	SOLID STATE SYSTEM
SUN SWITCH	CdS PHOTO CELL
LENS COLOR	CLEAR, YELLOW, RED OR GREEN
CHARACTERISTICS	Fl. 4sec. OR SPECIFIED
POWER SOURCE VOLTAGE	DC. 12V
MATERIAL	ANTI-CORROSIVE ALUMINUM ALLOY
INSTALLED PITCH DIAMETER	φ200mm
INSTALLED HOLE DIAMETER	4-16mm BY 25mm SLOT
APPLIED CABLE	φ11.8mm 2 CORE CABTIRE CABLE


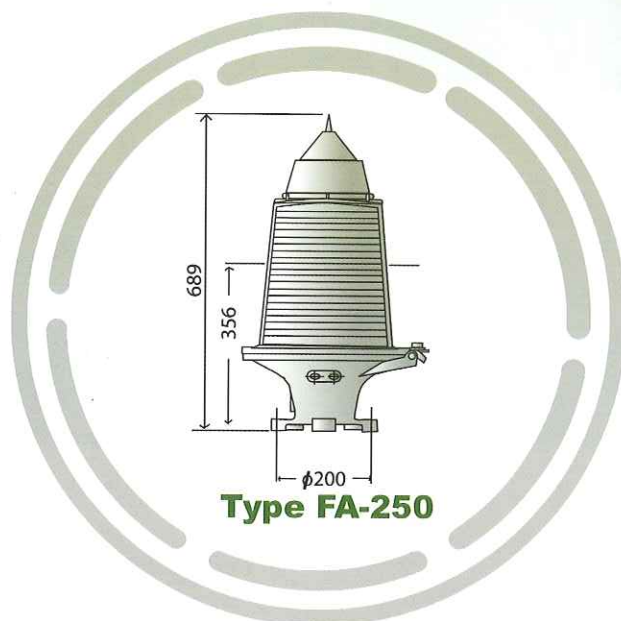


SPECIFICATIONS- LANTERN TYPE FA-249


HEIGHT OVERALL	APPROX.470mm
FOCAL PLANE HEIGHT	APPROX.290mm
WEIGHT	APPROX.3kg
LENS	φ155mm ACRYLIC FRESNEL LENS
LAMP SIZE	12V, 3W, 6.6W, 9.2W, 13.8W, 24.4W, 36.6W 6-LAMP TURRET SYSTEM
FLASHER	SOLID STATE SYSTEM
SUN SWITCH	CdS PHOTO CELL
LENS COLOR	CLEAR, YELLOW, RED OR GREEN
CHARACTERISTICS	Fl. 4sec. OR SPECIFIED
POWER SOURCE VOLTAGE	DC. 12V
MATERIAL	POLYCARBONATE
INSTALLED PITCH DIAMETER	φ200mm
INSTALLED HOLE DIAMETER	4-φ15.8mm
APPLIED CABLE	φ11.8mm 2 CORE CABTIRE CABLE

SPECIFICATIONS- LANTERN TYPE SA-133, RL-133


HEIGHT OVERALL	APPROX.320mm
FOCAL PLANE HEIGHT	APPROX.180mm
WEIGHT	APPROX.3kg
LENS	φ133mm POLYCARBONATE FRESNEL LENS
LAMP SIZE	12V, 1.5W, 3W, 10W BI-FILAMENT
FLASHER	SOLID STATE SYSTEM
SUN SWITCH	CdS PHOTO CELL
LENS COLOR	CLEAR, YELLOW, RED OR GREEN
CHARACTERISTICS	Fl. 4sec. OR SPECIFIED
POWER SOURCE VOLTAGE	DC. 12V
MATERIAL	ANTI-CORROSIVE ALUMINUM ALLOY
INSTALLED HOLE PITCH DIAMETER	φ160mm
INSTALLED HOLE DIAMETER	4-φ12mm
APPLIED CABLE	φ11.8mm 2 CORE CABTIRE CABLE

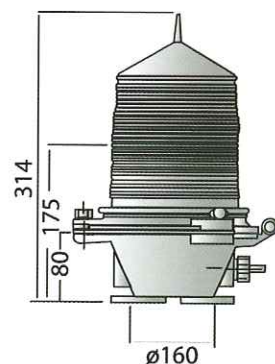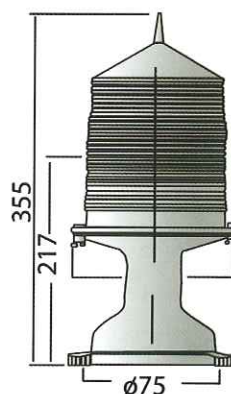

LANTERN LED TYPE

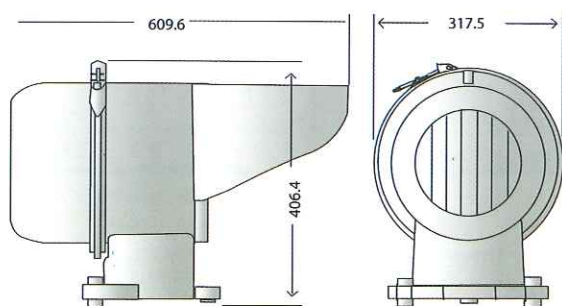

RANGE LANTERN

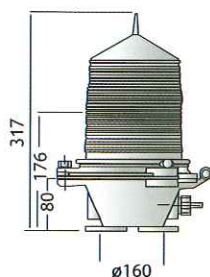


Type RL-133LS

SPECIFICATION- LANTERN TYPE RL-133LS

HEIGHT OVERALL	APPROX.320mm
FOCAL PLANE HEIGHT	APPROX.180mm
WEIGHT	APPROX.3kg
LENS	φ133mm POLYCARBONATE FRESNEL LENS SOLAR PANEL SET UP INSIDE LENS
LAMP SIZE	LED LAMP 6V, 0.4W, 0.96W
FLASHER	SOLID STATE SYSTEM
SUN SWITCH	CdS PHOTO CELL
LENS COLOR	CLEAR, YELLOW, RED OR GREEN
CHARACTERISTICS	Fl. 4sec. OR SPECIFIED
POWER SOURCE VOLTAGE	DC. 12V
MATERIAL	ANTI-CORROSIVE ALUMINUM ALLOY
INSTALLED PITCH DIAMETER	φ160mm
INSTALLED HOLE DIAMETER	4-φ12mm
APPLIED CABLE	φ11.8mm 2 CORE CABTIRE CABLE

SPECIFICATION- LANTERN TYPE FA-240

HEIGHT OVERALL	APPROX.410mm
FOCAL PLANE HEIGHT	APPROX.220mm
WEIGHT	APPROX.13kg
LENS	FLATLIGHT OR SPREADLIGHT LENS
LAMP SIZE	12V, 3W, 6.6W, 9.2W, 13.8W, 24.4W, 36.6W 6-LAMP TURRET SYSTEM
FLASHER	SOLID STATE SYSTEM
SUN SWITCH	CdS PHOTO CELL
LENS COLOR	CLEAR, YELLOW, RED OR GREEN
CHARACTERISTICS	Fl. 4sec. OR SPECIFIED
POWER SOURCE VOLTAGE	DC. 12V
MATERIAL	STAINLESS STEEL, ANTI-CORROSIVE AND FIBERGLASS
INSTALLED PITCH DIAMETER	188mm x 218mm
INSTALLED HOLE DIAMETER	4-φ12mm
APPLIED CABLE	φ11.8mm 2 CORE CABTIRE CABLE

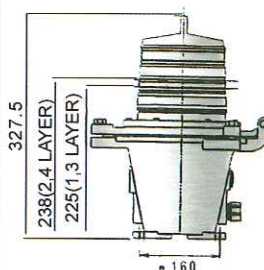

Type RL-123

SPECIFICATION- LANTERN TYPE RL-123

HEIGHT OVERALL	APPROX.330mm
FOCAL PLANE HEIGHT	APPROX.230mm(1 AND 3 LAYER) APPROX.240mm(2 AND 4 LAYER)
WEIGHT	APPROX.3kg
LENS	φ123mm POLYCARBONATE FRESNEL LENS
LAMP SIZE	12V, 1.4W, 1.9W, 2.0W, 2.2W, 2.9W, 3.4W, 3.7W, 3.7W, 3.8W, 4.3W, 4.7W, 4.8W, 4.9W, 5.3W, 6.1W, 6.8W, 8.6W, 9.6W, 11.5W, 14.4W, 19.2W
FLASHER	SOLID STATE SYSTEM
SUN SWITCH	CdS PHOTO CELL
LIGHT COLOR	CLEAR, YELLOW, RED OR GREEN
CHARACTERISTICS	Fl. 4sec. OR SPECIFIED
POWER SOURCE VOLTAGE	DC. 12V
MATERIAL	ANTI-CORROSIVE ALUMINUM ALLOY
INSTALLED PITCH DIAMETER	φ160mm
INSTALLED HOLE DIAMETER	4-φ12mm
APPLIED CABLE	φ11.8mm 2 CORE CABTIRE CABLE